

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050818 A1

(51) International Patent Classification⁷: H02K 3/26, (74) Agent: COLLINSON & CO; 117 King William Street, 15/085 Adelaide, S.A. 5000 (AU).

(21) International Application Number: PCT/AU2004/001601 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 19 November 2004 (19.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 2003906405 20 November 2003 (20.11.2003) AU

(71) Applicant (for all designated States except US): INTELLIGENT ELECTRIC MOTOR SOLUTIONS PTY LTD [AU/AU]; 11 Manton Street, Hindmarsh, S.A. 5007 (AU).


(72) Inventor; and

(75) Inventor/Applicant (for US only): ATKINSON, Donald, Alfred [AU/AU]; 11 Manton Street, Hindmarsh, S.A. 5007 (AU).

Published: — with international search report

[Continued on next page]

(54) Title: ELECTRIC MACHINE IMPROVEMENT

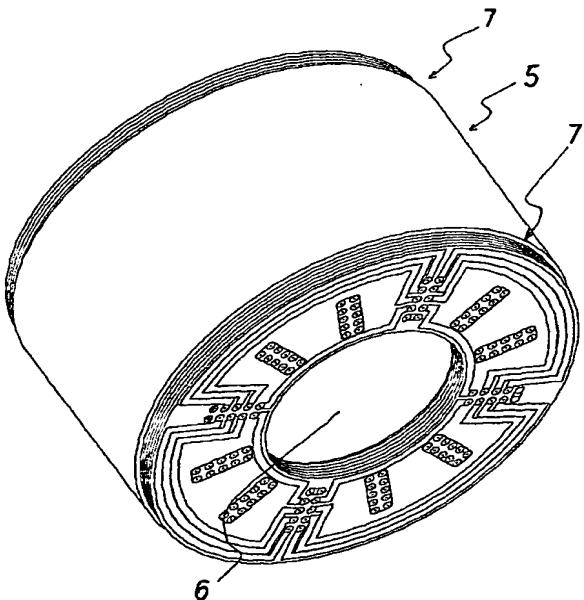

(57) Abstract: An electric machine which includes a magnetically inducible core (60), at least three elongated first, second and third current carrying conductors (64-66) passing through a respective aperture (68) through the core, a first end (15, 69) of the first conductor and a first end of the second conductor are electrically connected by a first bridging member (8) located on a first side of the core, a second end of the second conductor and a second end of the third conductor are electrically connected by a second bridging member (8) located on a second side of the core (figures 4, 5).

WO 2005/050818 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.